



(/)

[ABOUT US \(ABOUT.PHP\)](#)

[PRODUCTS](#)

[CERTIFICATIONS \(/CERTIFICATIONS.PHP\)](#)

[TRADE SHOWS \(/TRADE-SHOWS.PHP\)](#)

[CONTACT \(/CONTACT.PHP\)](#)



Terminations

Home / Terminations / Terminations upto 36 kV For 3 Core XLPE/EPR Insulated Cable

Terminations upto 36 kV For 3 Core XLPE/EPR Insulated Cable

XSO/E-2236

DENSONS HEAT SHRINKABLE TERMINATIONS UPTO 36 kV For 3 Core XLPE/EPR Insulated Cable

[Enquire Now \(enquire-now.php?pcode=XSO/E-2236\)](#)

Heat Shrink Terminations

Heat Shrinkable Terminations for Low Tension PVC/XLPE/PILC (heat-shrinkable-terminations-for-low-tensionpvcxlpepilc.php)

Heat Shrinkable Terminations upto 15 kV for PILC Cables (BELTED) (heat-shrinkable-terminations-3-core-pilc-belted.php)


Heat Shrinkable Terminations upto 36 kV For 3 Core XLPE/EPR Insulated Cable (heat-shrinkable-terminations-36kv-3-core-xlpe-epr.php)

Heat Shrinkable Terminations upto 36 kV for PILC Cables (terminations-upto-36-kv-for-pilc-cables.php)

Heat Shrinkable Terminations upto 36 kV (For Single Core Aerial Bunched Cable) (heat-shrinkable-

Features

- All key inputs are produced in-house.
- Continuous operation temperature-55°C to 120°C.
- Corrosion resistant and unlimited shelf life.
- In compliance with IEC-60502-4 / IS-13573.
- Electrolytic grade connectors.

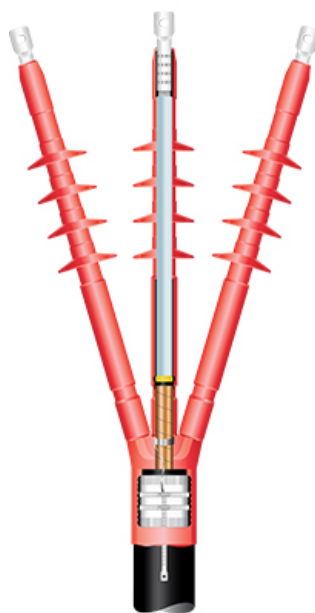

In conformance with IEEE-48,
VDE 0278 & IS: 13573.

[terminations-36kv-aerial-bunched-cables.php](#)

[Heat Shrinkable Terminations for 72.5 kV \(For Single Core XLPE Cable\) \(heat-shrinkable-terminations-single-core-xlpe-cables.php\)](#)

[Heat Shrinkable Terminations upto 36 kV For Single Core XLPE/EPR Insulated \(heat-shrinkable-terminations-36kv-single-core-xlpe-epr.php\)](#)

Specifications

Test Item of Heat Shrinkable Termination as per IEC-60502-4 / IS:13573

TEST	TYPE XSO/E - 2236
A.C. Dry withstand Voltage	75 kV / 1 min
Impulse withstand Voltage	170 kV / 10 shots
Corona extinction Voltage	More than 38 kV

Ordering Information

CABLE SIZE (Sq. mm)	FOR 22 kV INDOOR (Kit Code)	
3 x 16 - 50	XSE - 21	Enquire Now (/enquire-now.php?pcode=XSE-21)
3 x 70 - 120	XSE - 22	Enquire Now (/enquire-now.php?pcode=XSE-22)
3 x 150 - 225	XSE - 23	Enquire Now (/enquire-now.php?pcode=XSE-23)
3 x 240 - 400	XSE - 24	Enquire Now (/enquire-now.php?pcode=XSE-24)

CABLE SIZE (Sq. mm)	FOR 22 kV OUTDOOR (Kit Code)
---------------------	------------------------------

mm)	Code)	
3 x 16 - 50	XSO - 21	Enquire Now (/enquire-now.php?pcode=XSO-21)
3 x 70 - 120	XSO - 22	Enquire Now (/enquire-now.php?pcode=XSO-22)
3 x 150 - 225	XSO - 23	Enquire Now (/enquire-now.php?pcode=XSO-23)
3 x 240 - 400	XSO - 24	Enquire Now (/enquire-now.php?pcode=XSO-24)

CABLE SIZE (Sq. mm)	FOR 33 kV INDOOR (Kit Code)	
3 x 25 - 50	XSE - 31	Enquire Now (/enquire-now.php?pcode=XSE-31)
3 x 70 - 95	XSE - 32	Enquire Now (/enquire-now.php?pcode=XSE-32)
3 x 120 - 185	XSE - 33	Enquire Now (/enquire-now.php?pcode=XSE-33)
3 x 240 - 400	XSE - 34	Enquire Now (/enquire-now.php?pcode=XSE-34)

CABLE SIZE (Sq. mm)	FOR 33 kV OUTDOOR (Kit Code)	
3 x 25 - 50	XSO - 31	Enquire Now (/enquire-now.php?pcode=XSO-31)
3 x 70 - 95	XSO - 32	Enquire Now (/enquire-now.php?pcode=XSO-32)
3 x 120 - 185	XSO - 33	Enquire Now (/enquire-now.php?pcode=XSO-33)
3 x 240 - 400	XSO - 34	Enquire Now (/enquire-now.php?pcode=XSO-34)